

1500

# MANUAL OR POWER REWIND REELS

To handle single 1/4" through 5/8" I.D. hose.

- Lightweight compact reels designed for long lengths of hose in manual and power rewind.
- Direct crank rewind is permanently attached.
- Chain and sprocket drive powered by electric, hydraulic, or compressed air motor.
- Manual reels include: cam-lock drag brake, spring actuated pin lock.
- Standard inlet 90° ball bearing swivel joint 1/2" female NPT threads.
- Standard outlet 1/2" female NPT threads.
- Optional Rollers: Specify roller position when ordering.
- Pressures to 3000 psi (207 bar)
- Temperatures from +20° F to +400° F (-7° C to +204° C).
- Consult factory for other pressures & temps.



Electric Rewind  
Standard Configuration Shown

For:

- Lawn Care
- Pest Control
- Pressure Washing
- Agriculture
- Steam Cleaning



Optional External  
Mounting Brackets  
part no. 9906.0027.  
Add 2-1/2" to the X  
dimensions shown in  
the chart.

## Parts Drawing – ISO 90 (power); ISO 179 (manual)

Model Number	Hose Capacity of Reel feet m.					Approx. Weight Crank Rewind 3 lb. kg.			Reel Dimensions*** inches mm.						
	I.D. (in)	1/4"	3/8"	1/2"	5/8"	NET	UPS/ FedEx SHIP Wt.	Freight SHIP Wt.	A	B	E CRANK	E POWER	F CRANK	F POWER	X
	I.D. (mm)	6	10	13	16										
For Power Rewind See Note 5	O.D. (in)	5/8"	3/4"	7/8"	1"										
	O.D. (mm)	16	19	22	25										
1514-17-18		175 53	125 38	75 23	50 15	27 12	65* 30	62 28	11 279	6 152	16.5 419	19 483	18.5 470	16.5 419	9.5 241
1520-17-18		350 107	275 84	175 53	125 38	29 13	80* 36	64 29	17 432	12 305	16.5 419	19 483	24.5 622	22.5 572	15.5 394
1526-17-18		500 152	400 122	300 91	200 61	31 14	98* 45	66 30	23 584	18 457	16.5 419	19 483	30.5 775	28.5 724	21.5 546
1530-17-18		— —	500 152	375 114	275 84	33 15	110* 50	68 31	27 686	22 559	16.5 419	19 483	34.5 876	32.5 826	25.5 648
1536-17-18		— —	— —	475 145	350 107	35 16	129* 59	70 32	33 838	28 711	16.5 419	19 483	40.5 1029	38.5 978	31.5 800


### Notes:

- Specifications subject to change.
- Upon request, reels can be supplied with drum lengths other than shown.
- Weights shown in chart are for crank rewind models. ADD these amounts for power rewind models, does not apply to FedEx or UPS.

Net (lbs.)/kg      Ship (lbs.)/kg

Electric      18/8.2      18/8.2  
Hydraulic      15/6.8      15/6.8  
Air      15/6.8      15/6.8

- \* Dimensional weight applies when shipped as a parcel package (via FedEx or UPS Ground).
4. Dimension "F" is the overall length of standard model reels.
5. When ordering power rewind models, prefix model number with:  
A = Air Rewind    E = Electric Rewind    HD = Hydraulic Rewind  
(Air rewind reels are supplied with control valve and 18" air hose; 12v and 24v DC rewind reels are supplied with switch and solenoid; 115v AC rewind reels are not supplied with switch but can be ordered separately; hydraulic rewind reels are not supplied with control valve.)
6. Manual rewind available in RT or LB configurations only.
7. **Finish:** refer to Page 4.
8. **Be sure to check dimensions and weights prior to ordering.**
9. Some roller options may prohibit the use of our molded chain guard.

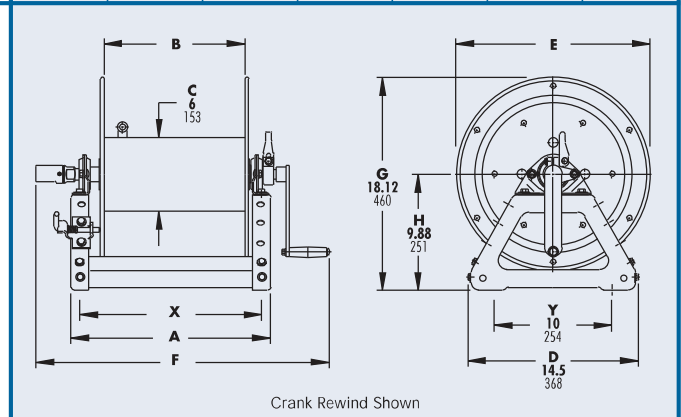

Crank Rewind Shown

**NOTICE:** A Flexible Connector must be used between the inlet pipe and the inlet swivel joint.

\*\*\* x,y indicate mounting holes. See page 2