




pressure cleaning

HT Series Pumps



The HT line of pumps features "High Tech" packing and "High Temp" valve design. These premium pumps can withstand temperatures up to 185° F and can run dry for several hours. The nickel plated manifold and valve plugs provide corrosion resistant operation and help reduce damage caused by cavitation. Choose from a variety of different size pumps based on the application.

HT60 Series



Ideal for use in carpet cleaning and other high pressure applications. This pump offers a compact and economical design.

Product No.	GPM	PSI	RPM	HP	Shaft Size	Weight
HT6004	1.19	2175	1450	1.75 GHP	16 mm	16 lbs
HT6007	1.85	2175	1450	2.72 GHP	16 mm	16 lbs
HT6008	2.64	2175	1750	3.90 GHP	16 mm	16 lbs

HTS 63 Series



Specifically designed to handle rigorous duty cycles, high temperatures and chemical associated with self-serve car wash applications. Also ideal for carpet cleaning and other high pressure cleaning applications. This pump offers a compact and economical design.

*HT63 series replaced by HTS63


Product No.	GPM	PSI	RPM	HP	Shaft Size	Weight
HTS6311	2.90	2030	1450	4.00	24 mm	18 lbs
HTS6313	3.43	2465	1450	5.50	24 mm	18 lbs
HTS6315	3.96	2030	1750	5.50	24 mm	18 lbs

HT47 Series



Specifically designed to handle rigorous duty cycles, high temperatures and chemical associated with self-serve car wash applications. Also ideal for carpet cleaning and other high pressure cleaning applications.

Product No.	GPM	PSI	RPM	HP	Shaft Size	Weight
HT4715	3.96	2320	1450	6.20	24 mm	32 lbs
	2.64	2320	900	4.15		
HT4718	4.75	2320	1450	7.50	24 mm	32 lbs
	3.17	2320	900	4.99		
HT4721	5.55	2030	1450	7.50	24 mm	32 lbs
	4.50	2320	1200	7.0		
	3.43	2320	950	5.4		
HT4723	5.00	2320	1200	7.90	24 mm	32 lbs
	3.96	2320	900	6.23		



NEW!

Interpump E2 & E3 Series

- New dual lip oil seal - better oil/ water sealing
- New guiding system - optimal sliding of the piston guide assembly reduces friction between the pistons and the seals (longer seal life)
- New optimized outlet valves - better volumetric efficiency
- Inlet valves interchangeable between the 47 and 66 series
- New generation seal package with special piston guiding bush
- New piston fastening system - eliminates the risk of pressure build up inside the piston
- Large diameter oil sight glass
- Oil dipstick with breather

- Oversized connecting rods - reduce specific pressure and better lubrication
- Large oil capacity for better cooling and lubrication
- New dual diameter piston guide - reducing risk of oil leak, extended life of oil seal
- Oversized forged crank shaft and gudgeon pin
- New dust protection chamber between crankcase and manifold
- New solid ceramic piston with dual guide system
- New forged brass manifold
- Can be ordered with built in automatic regulator - specify "H" model number

Evolution 2 E2 Standard Version



Evolution 2 E2 A Version for Electric Motor NEMA 184 TC



Product No.	GPM	PSI	RPM	HP
E2B2008	1.98	2900	1450	3.9
E2B2010	2.64	2900	1450	5.2
E2B1711	2.91	2465	1450	4.9
E2B1712	3.17	2465	1450	5.3
E2B1713	3.43	2465	1450	5.7
E2B2014	2.70	2900	1450	7.3
E2B2008	1.98	2900	1450	3.9
E2B2808	1.98	4000	1450	5.4
E2C2109	2.38	3045	1750	4.9
E2C2111	2.91	3045	1750	6.0
E2C2112	3.17	3045	1750	6.5
E2C1713	3.43	2465	1750	5.7
E2C1714	3.70	2465	1750	6.2
E2C1715	3.96	2465	1750	6.6
E2C2016	4.23	2900	1750	8.3
E2C2809	2.38	4000	1750	6.4
E2E2108	2.11	3045	3400	4.4
E2E2111	2.91	3045	3400	6.0
E2E2113	3.43	3045	3400	7.1
E2E2116	4.23	3045	3400	8.7
E2E2808	2.11	4000	3400	5.7
E2E2810	2.64	4000	3400	7.1
E2E2812	3.17	4000	3400	8.6
E2E2813	3.43	4000	3400	9.3
E2E2815	3.96	4000	3400	10.7
E2C2109A	2.38	3045	1750	4.9
E2C2111A	2.91	3045	1750	6.0
E2C1713A	3.43	2465	1750	5.7
E2C1714A	3.70	2465	1750	6.2
E2C1715A	3.96	2465	1750	6.6

Cont'd

Maritimes/Quebec/Ontario

Phone TOLL FREE: 1.888.881.6667
Fax TOLL FREE: 1.800.350.5666

B9

www.pressurewashcomponents.ca

Alberta/Manitoba/Sask/BC

Phone TOLL FREE: 1.800.527.8592
Fax TOLL FREE: 1.800.661.3719




pressure cleaning

NEW!

Interpump E2 & E3 Series

	Product No.	GPM	PSI	RPM	HP
Evolution 2 E2 C 3/4 Version for SAE J609 Gasoline Engines	E2E2108C3/4	2.11	3045	3400	4.4
	E2E2111C3/4	2.91	3045	3400	6.0
	E2E2113C3/4	3.43	3045	3400	7.1
Evolution 2 E2 C 1 Version for SAE J609 Gasoline Engines	E2E2111C1	2.91	3045	3400	6.0
	E2E2113C1	3.43	3045	3400	7.1
	E2E2116C1	4.23	3045	3400	8.7
	E2E2808C1	2.11	4000	3400	5.7
	E2E2810C1	2.64	4000	3400	7.1
	E2E2812C1	3.17	4000	3400	8.6
	E2E2813C1	3.43	4000	3400	9.3
	E2E2815C1	3.96	4000	3400	10.7
Evolution 3 E3 Standard Version	E3A1713B	3.43	2465	1000	5.7
	E3A1515B	3.96	2175	1000	5.8
	E3A2113BN	3.43	3000	1000	7.1
	E3A2115BN	3.96	3000	1000	8.2
	E3B1911B	2.91	2755	1450	5.4
	E3B1713B	3.43	2465	1450	5.7
	E3B1515B	3.96	2175	1450	5.8
	E3B1218B	4.76	1750	1450	5.6
	E3B1021B	5.55	1450	1450	5.5
	E3B2511BN	2.91	3625	1450	7.1
	E3B2513BN	3.43	3625	1450	8.4
	E3B2515BN	3.96	3625	1450	9.7
	E3B2118BN	4.78	3000	1450	9.8
	E3B2121BN	5.55	3000	1450	11.5
	E3C1713B	3.43	2465	1750	5.7
	E3C1515B	3.96	2175	1750	5.8
	E3C1218B	4.76	1750	1750	5.6
	E3C1021B	5.55	1450	1750	5.5
	E3C2513BN	3.43	3625	1750	8.4
	E3C2515BN	3.96	3625	1750	9.7
	E3C2518BN	4.78	3625	1750	11.7
	E3C2521BN	5.55	3625	1750	13.6
	E3E2813BN	3.43	4000	3400	9.3
	E3E2815BN	3.96	4000	3400	10.7
	E3E2517BN	4.49	3500	3400	11.0
	E3E2520BN	5.28	3500	3400	13.0

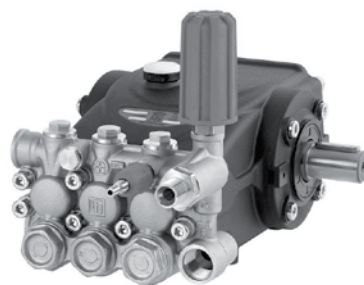

Maritimes/Quebec/Ontario


Phone TOLL FREE: 1.888.881.6667
Fax TOLL FREE: 1.800.350.5666

B10

www.pressurewashcomponents.ca


Alberta/Manitoba/Sask/BC

Phone TOLL FREE: 1.800.527.8592
Fax TOLL FREE: 1.800.661.3719



HT66 Series


Designed for use in prep units, conveyor and multiple gun applications. Excellent for carpet cleaning and for use in industrial plant systems where hot water is required.



Product No.	GPM	PSI	RPM	HP	Shaft Size	Weight
HT6628	7.40	3600	1750	18.20	24 mm	40.8 lbs
	5.00	3600	1200	12.33		
	3.96	3600	950	10.00		
HT6639	10.30	2900	1750	20.00	24 mm	40.8 lbs
	8.45	2900	1450	16.60		
HT6646	12.15	2465	1750	20.00	24 mm	40.8 lbs
	10.04	2900	1450	19.74		

HT69 Series

Designed for touchless carwash systems, multiple gun systems and industrial plant systems where hot water is required.





Product No.	GPM	PSI	RPM	HP	Shaft Size	Weight
HT6968	18.0	1160	1000	15.0	35 mm	56.9 lbs

HT70 & HT71 Series


Designed for tunnel/conveyor applications. Also perfect for use in industrial plant systems where hot water is required.

*HT7095 replaced by HT7095H



Product No.	GPM	PSI	RPM	HP	Shaft Size	Weight
HT7095H	26.4	1305	1450	23.4	30 mm	79.6 lbs
HT71150	49.7	1450	1000	48.8	40 mm	157.0 lbs







pressure cleaning

SS Series Stainless Steel Pumps




A new prestigious series of pumps with 316 SS manifold, designed to satisfy several applications in the fields of reverse osmosis, food, chemical and pharmaceutical industry.

- 316 Stainless steel manifold
- 24 mm solid shaft
- 185°F Max.Temperature



Product No.	GPM	PSI	RPM	HP	Weight
SEL1507	1.85	2175	1450	3	20.9 lbs
SEL1509	2.38	2175	1450	3.5	20.9 lbs
SEL1411	2.9	2030	1450	4	20.9 lbs
SEL1413	3.43	2030	1450	4.8	20.9 lbs
SEL1414	3.69	2030	1450	5.1	20.9 lbs
SUL1509	2.38	2175	1750	3.5	20.9 lbs
SUL1511	2.9	2175	1750	4.5	20.9 lbs
SUL1413	3.43	2000	1750	4.7	20.9 lbs
SUL1415	4.02	2000	1750	5.5	20.9 lbs
SW1513	3.43	2175	1450	5	33.1 lbs
SW1515	3.96	2175	1450	5.5	33.1 lbs
SW1518	4.75	2175	1450	7	33.1 lbs
SW1521	5.55	2175	1450	7.5	33.1 lbs
ST1515	3.96	2175	1750	5.5	33.1 lbs
ST1518	4.75	2175	1750	7	33.1 lbs
ST1521	5.55	2175	1750	7.5	33.1 lbs
SW1525	6.6	2175	1450	9.7	46.3 lbs
SW1530	7.92	2175	1450	11.7	46.3 lbs
SW1535	9.25	2175	1450	13.6	46.3 lbs
SW1541	10.83	2175	1450	16	46.3 lbs
ST1530	7.92	2175	1750	11.7	46.3 lbs
ST1535	9.25	2175	1750	13.6	46.3 lbs
ST1540	10.56	2175	1750	15.6	46.3 lbs
ST1550	13.2	2175	1750	19.5	46.3 lbs

W827 Plunger Pump



Product No.	GPM	PSI	RPM	HP	Shaft Size	Weight
W827	18.0	1200	1000	14.5	35 mm	56.9 lbs

Maritimes/Quebec/Ontario


Phone TOLL FREE: 1.888.881.6667
Fax TOLL FREE: 1.800.350.5666

B12

www.pressurewashcomponents.ca

Alberta/Manitoba/Sask/BC

Phone TOLL FREE: 1.800.527.8592
Fax TOLL FREE: 1.800.661.3719




NEW!

Series 44 Triplex Plunger Pump for Direct Couple to Electric Motor (NEMA-184C)

With hollow shaft, flanged for direct couple to electric motor (NEMA-184C). Forged brass manifold with lifetime warranty and premium roller bearings.



Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1/2"-14 BSP-F
Discharge Port Thread: 3/8"-19 BSP-F
Shaft Diameter: 1.125 in./28.5mm
Pump Dimensions: 8.8" x 8.8" x 6.3"
Max. Inlet Vacuum: 3 ft. Water (2.6 in. Hg)
Crankcase Oil Capacity: 14.0 oz.



Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
W959BH	4.2	2500	1750	0.708 in./18mm	0.512 in./13mm	7.2 EBHP	18.5 lbs
W956BH	3.6	2500	1750	0.708 in./18mm	0.433 in./11mm	6.2 EBHP	18.5 lbs
W953BH	3	3000	1750	0.591 in./15mm	0.512 in./13mm	6.3 EBHP	18.5 lbs
W950BH	2.5	2500	1750	0.591 in./15mm	0.433 in./11mm	4.3 EBHP	18.5 lbs
W14200BNH	3.6	2900	1750			7.0 EBHP	18.5 lbs

H - Hollow Shaft

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
W959BAV	4.2	2500	1750	0.708 in./18mm	0.512 in./13mm	7.2 EBHP	18.5 lbs
W956BAV	3.6	2500	1750	0.708 in./18mm	0.433 in./11mm	6.3 EBHP	18.5 lbs
W953BAV	3	2500	1750	0.591 in./15mm	0.512 in./13mm	5.2 EBHP	18.5 lbs
W950BAV	2.5	2500	1750	0.591 in./15mm	0.433 in./11mm	4.3 EBHP	18.5 lbs


V - Built-In Unloader

Series 44 Triplex Plunger Pump for Direct Couple to Gasoline Engines (SAE J609)

With hollow shaft, flanged for direct couple to gasoline engines (SAE J609). Forged brass manifold with lifetime warranty and premium roller bearings. Flanged for mounting on up to 16.5 hp engines.



Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1/2"-14 BSP-F
Discharge Port Thread: 3/8"-19 BSP-F
Shaft Diameter: 1.0 in./25.4 mm
Pump Dimensions: 8.8" x 9.7" x 6.5"
Max. Inlet Vacuum: 3 ft. Water (2.6 in. Hg)
Crankcase Oil Capacity: 14.0 oz.



Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
WW962BC	4.6	3000	3400	0.591 in./15 mm	0.433 in./11 mm	14.2 GHP	19.1 lbs
WW965BC	4	4000	3400	0.512 in./13 mm	0.512 in./13 mm	16.5 GHP	20.0 lbs
WW961BC	4	3000	3400	0.591 in./15 mm	0.374 in./9.5 mm	12.4 GHP	19.1 lbs
WW964BC	3.5	4000	3400	0.512 in./13 mm	0.433 in./11 mm	14.4 GHP	20.0 lbs
WW960BC	3.5	3000	3400	0.591 in./15 mm	0.335 in./8.5 mm	10.8 GHP	19.1 lbs
WW963BC	3	4000	3400	0.512 in./13 mm	0.374 in./9.5 mm	12.4 GHP	20.0 lbs

Maritimes/Quebec/Ontario

Phone TOLL FREE: 1.888.881.6667
 Fax TOLL FREE: 1.800.350.5666

B13

www.pressurewashcomponents.ca

Alberta/Manitoba/Sask/BC

Phone TOLL FREE: 1.800.527.8592
 Fax TOLL FREE: 1.800.661.3719



pressure cleaning

Series 44 Triplex Plunger Pump for Direct Couple to Gasoline Engines (SAE J609)



With hollow shaft, flanged for direct couple to gasoline engines (SAE J609). Built in unloader/injector. Forged brass manifold with lifetime warranty and premium roller bearings. Flanged for use with engines up to 14.2 hp engines.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1/2"-14 BSP-F
Discharge Port Thread: 3/8"-19 BSP-F

Shaft Diameter: 1.0 in./25.4 mm
Pump Dimensions: 8.8" x 9.7" x 6.5"
Max. Inlet Vacuum: 3 ft. Water (2.6 in. Hg)
Crankcase Oil Capacity: 14.0 oz.



"RS" Version Shown

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
WW962BCV	4.6	3000	3400	0.591 in./15 mm	0.433 in./11 mm	14.2 GHP	19.3 lbs
WW961BCV	4	3000	3400	0.591 in./15 mm	0.374 in./9.5 mm	12.4 GHP	19.3 lbs
WW961BCVRS	4	3000	3400	0.591 in./15 mm	0.374 in./9.5 mm	12.4 GHP	19.3 lbs
WW960BCV	3.5	3000	3400	0.591 in./15 mm	0.335 in./8.5 mm	10.8 GHP	19.3 lbs
WW960BCVRS	3.5	3000	3400	0.591 in./15 mm	0.335 in./8.5 mm	10.8 GHP	19.3 lbs
WW961BCVSP	4	3500	3400	0.591 in./15mm	0.374 in./9.5mm	12.5 GHP	19.3 lbs

V - Built-In Unloader

RS - Reverse Shaft

NEW!

Series 44 Triplex Plunger Pump



With solid shaft. Forged brass manifold with lifetime warranty. Flex coupling and bell housing available for direct drive. Premium roller bearings.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1/2"-14 BSP-F
Discharge Port Thread: 3/8"-19 BSP-F

Shaft Diameter: 0.945 in./24.0 mm
Pump Dimensions: 8.6" x 8.7" x 5.5"
Max. Inlet Vacuum: 3 ft. Water (2.6 in. Hg)
Crankcase Oil Capacity: 14.0 oz.



Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
W959B	4.2	3000	1750	0.708 in./18 mm	0.512 in./13 mm	8.6 EBHP	18 lbs
	4.2	2500	1750	0.708 in./18 mm	0.512 in./13 mm	7.2 EBHP	18 lbs
WW965B	4	4000	3400	0.512 in./13 mm	0.512 in./13 mm	11.0 EBHP	18 lbs
W956B	3.6	2500	1750	0.708 in./18 mm	0.433 in./11 mm	6.2 EBHP	18 lbs
WW964B	3.5	4000	3400	0.512 in./13 mm	0.433 in./11 mm	9.6 EBHP	18 lbs
WW963B	3	4000	3400	0.512 in./13 mm	0.374 in./9.5 mm	8.2 EBHP	18 lbs
W953BV	3	2500	1750	0.591 in./15 mm	0.512 in./13 mm	5.1 EBHP	19 lbs
W14200BN	3.6	2900	1750	0.708in/ 18mm	0.708in/ 18mm	7.0 EBHP	19 lbs

V - Built-In Unloader

Hydraulic Bell Housing & Flex Coupler - for use with Series 47 & 66



- Kit includes bell housing, flex coupler and mounting hardware
- Easy to Install
- Mounts directly on the pump saving time on installation
- Improved pump life due to proper alignment with hydraulic motor
- Can be used on all Interpump Series 47 and 66

Product No.	Description
ZFH / ZGH47SBKIT	Bell Housing Kit

Maritimes/Quebec/Ontario


Phone TOLL FREE: 1.888.881.6667
Fax TOLL FREE: 1.800.350.5666

B14

www.pressurewashcomponents.ca

Alberta/Manitoba/Sask/BC


Phone TOLL FREE: 1.800.527.8592
Fax TOLL FREE: 1.800.661.3719



NEW!

Series 47 Triplex Plunger Pump

With solid shaft. Forged brass manifold with lifetime warranty. Heavy-duty tapered roller bearings and over-sized connecting rods for maximum life.



Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1/2"-14 BSP-F
Discharge Port Thread: 3/8"-19 BSP-F
Shaft Diameter: 0.945 in./24.0 mm
Pump Dimensions: 12.25" x 9.2" x 6.9"
Max. Inlet Vacuum: 9 ft. Water (7.9 in. Hg)
Crankcase Oil Capacity: 40.6 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
TS2021BN	5.6	3500	1450	0.787 in./20mm	0.630 in./16mm	13.5 EBHP	32.0 lbs
TS1021B	5.6	1700	1450	0.787 in./20mm	0.630 in./16mm	6.5 EBHP	32.0 lbs
T1011B*	5.6	1500	1450	0.787 in./20mm	0.630 in./16mm	5.5 EBHP	32.0 lbs
T1321B*	5.5	2100	1150	0.866 in./22mm	0.630 in./16mm	7.9 EBHP	32.0 lbs
T5050B	5	5000	1845	0.630 in./16mm	0.748 in./19mm	17.2 EBHP	41.0 lbs (30 psi inlet pressure)
T1621BN	5	2500	1050	0.866 in./22mm	0.630 in./16mm	8.6 EBHP	32.0 lbs
TS1621BN*	5	2500	1050	0.866 in./22mm	0.472 in./12mm	8.5 EBHP	32.0 lbs
T921B*	5	1700	1050	0.866 in./22mm	0.630 in./16mm	5.8 EBHP	32.0 lbs
TS2011BN	4.75	3000	1750	0.787 in./20mm	0.394 in./10mm	9.8 EBHP	32.0 lbs
TS1621BN	4.75	2500	1450	0.866 in./22mm	0.472 in./12mm	8.2 EBHP	32.0 lbs
TS1321B	4.75	2100	1450	0.866 in./22mm	0.472 in./12mm	6.8 EBHP	32.0 lbs
TS921B	4.75	1800	1450	0.866 in./22mm	0.472 in./12mm	5.9 EBHP	30.0 lbs
TS1011B	4.75	1500	1750	0.787 in./20mm	0.472 in./12mm	5.5 EBHP	32.0 lbs
T2011BN*	4.5	3000	1125	0.787 in./20mm	0.630 in./16mm	10.8 EBHP	32.0 lbs
TS2021BN	4.5	3500	1125	0.787 in./20mm	0.630 in./16mm	10.8 EBHP	32.0 lbs
TS1021B	4.5	3000	1125	0.787 in./20mm	0.630 in./16mm	6.5 EBHP	32.0 lbs
T1311B*	4.5	2200	1125	0.787 in./20mm	0.630 in./16mm	6.6 EBHP	32.0 lbs
T1011B*	4.5	2000	1125	0.787 in./20mm	0.630 in./16mm	5.5 EBHP	32.0 lbs
TS1331B	4.2	2000	1750	0.787 in./20mm	0.394 in./10mm	5.8 EBHP	32.0 lbs
T9281B	4	4000	1750	0.630 in./16mm	0.630 in./16mm	11.0 EBHP	33.0 lbs
TS1511B	4	3500	1450	0.787 in./20mm	0.472 in./12mm	9.6 EBHP	32.0 lbs
TS2011BN	4	3500	1450	0.787 in./20mm	0.472 in./12mm	9.6 EBHP	32.0 lbs
T9211B	4	3000	1750	0.787 in./20mm	0.394 in./10mm	8.2 EBHP	32.0 lbs
TS1011B	4	2000	1450	0.787 in./20mm	0.472 in./12mm	5.5 EBHP	32.0 lbs
TS1711B	3.5	2700	1450	0.787 in./20mm	0.394 in./10mm	7.2 EBHP	32.0 lbs
TS1331B	3.5	2100	1450	0.787 in./20mm	0.394 in./10mm	5.0 EBHP	32.0 lbs
TS821B	5.55	1450	1450	0.787 in./20mm	0.472 in./12mm	5.0 EBHP	32.0 lbs
W922BN	5.55	2900	1750	0.787 in./20mm	0.472 in./12mm	10 EBHP	32.0 lbs
W914B	5.55	1450	1750	0.787 in./20mm		5 EBHP	32.0 lbs
W51630	7.9	2320	1450	0.866 in./22mm		12 EBHP	33.0 lbs
W928	3.96	4000	1750	0.630 in./16mm		11 EBHP	32.0 lbs

* Drive Shaft Extensions on both sides of Pump

Maritimes/Quebec/Ontario


Phone TOLL FREE: 1.888.881.6667
 Fax TOLL FREE: 1.800.350.5666

B15

www.pressurewashcomponents.ca

Alberta/Manitoba/Sask/BC

Phone TOLL FREE: 1.800.527.8592
 Fax TOLL FREE: 1.800.661.3719



pressure cleaning

Series 47 Triplex Plunger Pump



With 1" gear box. Forged brass manifold with lifetime warranty. Heavy-duty tapered roller bearings and over-sized connecting rods for maximum life.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1/2"-14 BSP-F
Discharge Port Thread: 3/8"-19 BSP-F
Shaft Diameter: 1.0 in./25.4 mm
Pump Dimensions: 12.2" x 9.2" x 10.5"
Max. Inlet Vacuum: 9 ft. Water (7.9 in. Hg)
Crankcase Oil Capacity: 40.6 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
ZT9281BRS151	3.5	4000	3400	0.630 in./16mm	0.630 in./16mm	14.4 GHP	45.0 lbs


Series 48 Sixplex Plunger Pump




Forged Brass Manifold with lifetime warranty. Dual manifolds utilizing a common crankcase for efficient performance in high flow applications.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 3/4"-14 BSP-F
Discharge Port Thread: 3/8"-19 BSP-F
Shaft Diameter: 1.26 in./32.0 mm
Pump Dimensions: 16.1" x 11.2" x 7.9"
Max. Inlet Vacuum: 9 ft. Water (7.9 in. Hg)
Crankcase Oil Capacity: 54.0 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
TS1351B	11	2000	1450	0.787 in./20mm	0.630 in./16mm	15.0 EBHP	61.0 lbs
T1631B	10	2500	1080	0.866 in./22mm	0.630 in./16mm	17.2 EBHP	61.0 lbs
T2031B	9	3000	1140	0.787 in./20mm	0.630 in./16mm	18.5 EBHP	61.0 lbs



Series 49 Duplex Plunger Pump



With solid shaft. Duplex pulsing action for improved impacted cleaning. Ideal for drain cleaning and jetting applications. Forged brass manifold with a lifetime warranty.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1/2"-14 BSP-F
Discharge Port Thread: 3/8"-19 BSP-F
Shaft Diameter: 0.954 in./24.0 mm
Pump Dimensions: 8.8" x 6.8" x 5.4"
Max. Inlet Vacuum: 9 ft. Water (7.9 in. Hg)
Crankcase Oil Capacity: 10.1 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
T731B	3.5	1000	1750	0.787 in./20mm	0.472 in./12mm	2.5 EBHP	11.0 lbs
	3	1200	1450	0.787 in./20mm	0.472 in./12mm	2.4 EBHP	11.0 lbs
T721B	2.2	1200	1450	0.787 in./20mm	0.374 in./9.5mm	1.8 EBHP	11.0 lbs


Series 50 Triplex Plunger Pump



With solid shaft. Forged brass manifold with lifetime warranty. Flex coupling and bell housing available for direct drive. Solid ceramic plungers with continuously lubricated packings.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1/2"-14 BSP-F
Discharge Port Thread: 3/8"-19 BSP-F
Shaft Diameter: 0.945 in./24.0 mm
Pump Dimensions: 9.3" x 8.3" x 5.4"
Max. Inlet Vacuum: 9 ft. Water (7.9 in. Hg)
Crankcase Oil Capacity: 15.2 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
TT9441B	4.4	2500	3400	0.591 in./15mm	0.394 in./10mm	7.5 EBHP	18.7 lbs
T9971B	4	2000	1750	0.787 in./20mm	0.394 in./10mm	5.5 EBHP	19.0 lbs
T991B	4	1100	1750	0.787 in./20mm	0.394 in./10mm	3.0 EBHP	19.0 lbs
TT9351B	3.5	2500	3400	0.591 in./15mm	0.335 in./8.5mm	6.0 EBHP	18.7 lbs
T991B	3.5	1500	1450	0.787 in./20mm	0.394 in./10mm	3.6 EBHP	19.0 lbs
T9951B	3.5	1500	1750	0.787 in./20mm	0.335 in./8.5mm	3.6 EBHP	19.0 lbs
T911B	3.5	1400	1450	0.787 in./20mm	0.394 in./10mm	3.4 EBHP	15.0 lbs
T9961B	4	1100	1750	0.787 in./20mm	0.394 in./10mm	3.0 EBHP	17.0 lbs



pressure cleaning

Series 51 Triplex Plunger Pump



With hollow shaft, flanged for direct couple to electric motor (NEMA-56C).
Forged brass manifold with lifetime warranty.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 3/8"-19 BSP-F
Discharge Port Thread: 1/4"-19 BSP-F
Shaft Diameter: 0.750 in./19.0 mm and 0.625 in./15.9 mm
Pump Dimensions: 7.0" x 7.2" x 5.5"
Max. Inlet Vacuum: 3 ft. Water (2.6 in. Hg)
Crankcase Oil Capacity: 11.2 oz.

Product No.	GPM	PSI	RPM	Shaft	Bore	Stroke	HP	Weight
TT9091BA	3.5	2000	3400	3/4 in.	0.591 in./15mm	0.315 in./8mm	4.8 EBHP	11.5 lbs
TT9091BARS	3.5	2000	3400	3/4 in.	0.591 in./15mm	0.315 in./8mm	4.8 EBHP	11.5 lbs
TT9111BA	3	1500	1750	5/8 in.	0.709 in./18mm	0.370 in./9.4mm	3.1 EBHP	11.5 lbs
TT2530BA	2.88	2500	3400	3/4 in.	0.591 in./15mm	0.283 in./7.2mm	4.9 EBHP	11.4 lbs
TT2530BARS	2.88	2500	3400	3/4 in.	0.591 in./15mm	0.283 in./7.2mm	4.9 EBHP	11.4 lbs
TT2028BA	2.8	2000	3400	5/8 in.	0.591 in./15mm	0.260 in./6.6mm	3.8 EBHP	11.5 lbs
TT9071BA	2.8	1500	3400	5/8 in.	0.591 in./15mm	0.260 in./6.6mm	2.9 EBHP	11.5 lbs
T9051BA	2.11	1500	1750	5/8 in.	0.591 in./15mm	0.370 in./9.4mm	2.2 EBHP	11.5 lbs
TT9061BA	2.11	1500	3400	5/8 in.	0.591 in./15mm	0.197 in./5.0mm	2.2 EBHP	11.5 lbs
TT2021BA	2.1	2000	3400	5/8 in.	0.591 in./15mm	0.197 in./5.0mm	2.9 EBHP	11.5 lbs
TT1505BA	0.5	1500	1750	5/8 in.	0.709 in./18mm	0.079 in./2.0mm	0.5 EBHP	11.5 lbs

RS - Reverse Shaft

Series 51 Triplex Plunger Pump



With hollow shaft, flanged for direct couple to electric motor (NEMA-56C). Built-in unloader/injector. Ideal for general cleaning, reverse osmosis and misting applications.
Forged brass manifold with lifetime warranty.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1/2"-14 BSP-M
Discharge Port Thread: 3/8"-19 BSP-M
Pump Dimensions: 7.0" x 7.2" x 8.8"
Max. Inlet Vacuum: 3 ft. Water (2.6 in. Hg)
Crankcase Oil Capacity: 11.2 oz.

Product No.	GPM	PSI	RPM	Shaft	Bore	Stroke	HP	Weight
TT9091BAV	3.5	2000	3400	3/4" hollow	0.591 in./15mm	0.315 in./8mm	4.8 EBHP	12.0 lbs
TT2530BAV	2.88	2500	3400	3/4" hollow	0.591 in./15mm	0.283 in./7.2mm	4.9 EBHP	11.4 lbs
TT9071BAV	2.8	1500	3400	5/8" hollow	0.591 in./15mm	0.260 in./6.6mm	2.9 EBHP	12.0 lbs
T9051BAV	2.11	1500	1750	5/8" hollow	0.591 in./15mm	0.370 in./9.4mm	2.2 EBHP	12.0 lbs
TT9061BAV	2.11	1500	3400	5/8" hollow	0.591 in./15mm	0.197 in./5.0mm	2.2 EBHP	12.0 lbs

V - Built-In Unloader

Maritimes/Quebec/Ontario

B18

Alberta/Manitoba/Sask/BC

Phone TOLL FREE: 1.888.881.6667
Fax TOLL FREE: 1.800.350.5666

www.pressurewashcomponents.ca

Phone TOLL FREE: 1.800.527.8592
Fax TOLL FREE: 1.800.661.3719



Series 51 Triplex Plunger Pump



With hollow shaft, flanged for direct couple to gas engines. Ideal for general cleaning, reverse osmosis and misting applications. Forged brass manifold with lifetime warranty.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: Inlet 165° F
Port Thread: 3/8"-19 BSP-F
Discharge Port Thread: 1/4"-19 BSP-F
Shaft Diameter: 0.750 in./19.0 mm
Pump Dimensions: 7.2" x 7.2" x 5.5"
Max. Inlet Vacuum: 3 ft. Water (2.6 in. Hg)
Crankcase Oil Capacity: 11.2 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
TT1540BC	4	1500	3400	0.591 in./15mm	0.370 in./9.4mm	6.2 GHP	11.4 lbs
TT9091BC	3.5	2000	3400	0.591 in./15mm	0.315 in./8.0mm	7.2 GHP	11.4 lbs
TT2530BC	2.88	2500	3400	0.591 in./15mm	0.283 in./7.2mm	7.4 GHP	11.4 lbs
TT2028BC	2.8	2000	3400	0.591 in./15mm	0.260 in./6.6mm	5.8 GHP	11.4 lbs
TT9071BC	2.8	1500	3400	0.591 in./15mm	0.260 in./6.6mm	4.3 GHP	11.4 lbs
TT9061BC	2.11	1500	3400	0.591 in./15mm	0.197 in./5.0mm	3.3 GHP	11.4 lbs

Series 51 Triplex Plunger Pump



With hollow shaft, flanged for direct couple to gas engines. Built-in unloader/injector. Ideal for general cleaning, reverse osmosis and misting applications. Forged brass manifold with lifetime warranty.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 3/8"-19 BSP-F
Discharge Port Thread: 1/4"-19 BSP-F
Shaft Diameter: 0.750 in./19.0 mm
Pump Dimensions: 7.2" x 7.2" x 5.5"
Max. Inlet Vacuum: 3 ft. Water (2.6 in. Hg)
Crankcase Oil Capacity: 11.2 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
TT9091BCVRS	3.5	2000	3400	0.591 in./15mm	0.315 in./8mm	7.2 GHP	11.4 lbs
TT2530BCV	2.88	2500	3400	0.591 in./15mm	0.283 in./7.2mm	7.4 GHP	11.4 lbs
TT2530BCVRS	2.88	2500	3400	0.591 in./15mm	0.283 in./7.2mm	7.4 GHP	11.4 lbs
TT9071BCV	2.8	1500	3400	0.591 in./15mm	0.260 in./6.6mm	4.3 GHP	11.4 lbs
TT9061BCV	2.11	1500	3400	0.591 in./15mm	0.197 in./5.0mm	3.3 GHP	11.4 lbs

RS - Reverse Shaft
V - Built-In Unloader



pressure cleaning

Series 51 Triplex Plunger Pump for Pulley Mount or Direct Drive

With solid shaft. Standard with 24mm solid shaft for pulley mount or direct drive with flex coupler and bell housing.



Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: Inlet 165° F
Port Thread: 3/8"-19 BSP-F
Discharge Port Thread: 1/4"-19 BSP-F
Shaft Diameter: 0.945 in./24.0 mm
Pump Dimensions: 7.0" x 6.9" x 5.1"
Max. Inlet Vacuum: 3 ft. Water (2.6 in. Hg)
Crankcase Oil Capacity: 11.2 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
TT941B	3.43	1500	2800	0.591 in./15mm	0.370 in./9.4mm	3.5 EBHP	11.2 lbs
TT9111B	3	1500	1750	0.780 in./15mm	0.370 in./9.4mm	3.1 EBHP	11.2 lbs
TT931B	2.9	1500	2800	0.591 in./15mm	0.315 in./8.0mm	3.0 EBHP	11.2 lbs
TT951B	2.5	1500	2800	0.591 in./15mm	0.283 in./7.2mm	2.6 EBHP	11.2 lbs
TT901B	2.11	1500	2800	0.591 in./15mm	0.236 in./6.0mm	2.2 EBHP	11.2 lbs

**Looking for a Customized Pumping System?
Call Us Today for a Quote on a System
Designed & Engineered to Your Specific Requirements.**

Maritimes/Quebec/Ontario


Phone TOLL FREE: 1.888.881.6667
Fax TOLL FREE: 1.800.350.5666

B20


www.pressurewashcomponents.ca

Alberta/Manitoba/Sask/BC

Phone TOLL FREE: 1.800.527.8592
Fax TOLL FREE: 1.800.661.3719



Series 60 Duplex Plunger Pump

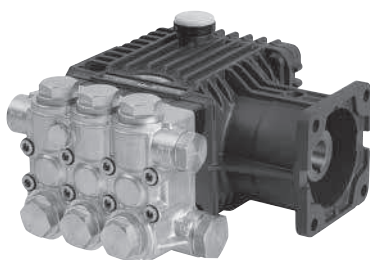

A new line of industrial pressure wash pumps in a compact size.

Special features include:

- Forged brass manifold
- Large sight glass for easy monitoring of oil levels
- 11.4 oz oil capacity for better cooling
- Oversized white bronze connecting rods for increased strength and stability
- Fully anodized crankcase for better protection against the elements
- Oversized ball bearings to allow higher load capabilities, and increased pump life.
- Improved low pressure seals
- White ceramic plungers (99% alumina-ceramic)
- Anti freeze bushing reduces chance of plunger cracking due to freezing
- Positive aligning valve cap.
- 1/8" gauge port
- Optional built in unloader valve

'A' version pumps are for use with electric motors 56C (5/8" hollow shaft)

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
UL1708A	2.11	2465	1750	0.591in./15mm	0.37in./9.4mm	3.6EBHP	13.3 lbs
UL1509A	2.38	2175	1750	0.709in./18mm	0.37in./9.4mm	3.5EBHP	13.3 lbs
UL1512A	3.17	2175	1750	0.709in./18mm	0.37in./9.4mm	3.6EBHP	13.3 lbs

'C' version pumps is for use with gasoline engines (3/4" hollow shaft)

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
UH1708C	2.11	2465	3400	0.591in./15mm	0.196in./5.0mm	3.6GHP	13.3 lbs
UH1711C	2.90	2465	3400	0.591in./15mm	0.282in./7.2mm	4.9GHP	13.3 lbs
UH1712C	3.17	2465	3400	0.591in./15mm	0.37in./7.2mm	5.3GHP	13.3 lbs
UH1713C	3.43	2465	3400	0.591in./15mm	0.37in./9.4mm	5.8GHP	13.3 lbs

'CVH' versions include H type built in unloader which allows you to set the pump pressure to zero when in bypass mode (3/4" hollow shaft)

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
UH1708CVH	2.11	2465	3400	0.591in./15mm	0.196in./5.0mm	3.6GHP	13.3 lbs
UH1711CVH	2.90	2465	3400	0.591in./15mm	0.282in./7.2mm	4.9GHP	13.3 lbs
UH1712CVH	3.17	2465	3400	0.591in./15mm	0.37in./7.2mm	5.3GHP	13.3 lbs
UH1713CVH	3.43	2465	3400	0.591in./15mm	0.315in./8.0mm	5.8GHP	13.3 lbs

VH - Built-In Unloader

Series 63 Triplex Plunger Pump



With 1" hollow shaft, flanged for direct couple to gasoline engines (SAE J609).

Forged brass manifold with lifetime warranty and oversized roller bearings.

- Max. Inlet Pressure:** 125 psi
- Max. Fluid Temperature:** 165° F
- Inlet Port Thread:** 1/2"-14 BSP-F
- Discharge Port Thread:** 3/8"-19 BSP-F
- Shaft Diameter:** 1.0 in./25.4 mm
- Pump Dimensions:** 8.4" x 8.3" x 4.8"
- Max. Inlet Vacuum:** 3 ft. Water (2.6 in. Hg)
- Crankcase Oil Capacity:** 14.0 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
UH2016C1	4.22	3000	3400	0.591 in./15mm	0.394 in./10.0mm	12.5 GHP	18.0 lbs
UH2013C1	3.43	3000	3400	0.591 in./15mm	0.315 in./8.0mm	11.0 GHP	18.0 lbs
UH2011C1	2.9	3000	3400	0.591 in./15mm	0.256 in./6.5mm	9.0 GHP	18.0 lbs

Maritimes/Quebec/Ontario

Phone TOLL FREE: 1.888.881.6667
Fax TOLL FREE: 1.800.350.5666

B21

www.pressurewashcomponents.ca

Alberta/Manitoba/Sask/BC

Phone TOLL FREE: 1.800.527.8592
Fax TOLL FREE: 1.800.661.3719



pressure cleaning

Series 63 Triplex Plunger Pump




With 3/4" hollow shaft, flanged for direct couple to gasoline engines (SAE J609).
Forged brass manifold with lifetime warranty and oversized roller bearings.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1/2"-14 BSP-F
Discharge Port Thread: 3/8"-19 BSP-F
Shaft Diameter: 0.750 in./19.0 mm
Pump Dimensions: 8.4" x 8.3" x 4.8"
Max. Inlet Vacuum: Flooded
Crankcase Oil Capacity: 14.0 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
UH2013C	3.43	3000	3400	0.591 in./15mm	0.315 in./9.0mm	6.2 GHP	18.0 lbs
UH2011C	2.9	3000	3400	0.591 in./15mm	0.256 in./6.5mm	5.3 GHP	18.0 lbs
UH2008C	2.11	3000	3400	0.591 in./15mm	0.197 in./5.0mm	4.1 GHP	18.0 lbs

Series 63 Triplex Plunger Pump



With hollow shaft, flanged for direct couple to electric motor (NEMA-184C).
Forged brass manifold with lifetime warranty and oversized roller bearings.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1/2"-14 BSP-F
Discharge Port Thread: 3/8"-19 BSP-F
Shaft Diameter: 1.125 in./28.5 mm
Pump Dimensions: 8.4" x 8.3" x 4.8"
Max. Inlet Vacuum: 3 ft. Water (2.6 in. Hg)
Crankcase Oil Capacity: 14.0 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
UL1715A	4.02	2415	1750	0.708 in./18mm	0.472 in./12.0mm	5.2 EBHP	18.0 lbs
UL1716A	4.22	2465	1750	0.709 in./18mm	0.472 in./12.0mm	5.2 EBHP	18.0 lbs
UL1413A	3.43	2000	1750	0.708 in./18mm	0.394 in./10.0mm	4.3 EBHP	18.0 lbs
UL2011A	2.9	3000	1750	0.591 in./15mm	0.191 in./12.0mm	5.3 EBHP	18.0 lbs
UL2009A	2.38	3000	1750	0.591 in./15mm	0.394 in./10.0mm	4.3 EBHP	18.0 lbs

* UL1415A replaced by UL1715A

Series 63 Triplex Plunger Pump



With solid shaft. Forged brass manifold with lifetime warranty and oversized roller bearings. Flex coupling and bell housing available for direct drive.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1/2"-14 BSP-F
Discharge Port Thread: 3/8"-19 BSP-F
Shaft Diameter: 0.945 in./24.0 mm
Pump Dimensions: 8.4" x 8.3" x 4.8"
Max. Inlet Vacuum: 3 ft. Water (2.6 in. Hg)
Crankcase Oil Capacity: 14.0 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
UH2016B	4.22	2900	3400	0.591 in./15mm	0.394 in./10.0mm	8.2 EBHP	19.0 lbs
UL1415B	4.02	2000	1750	0.709 in./18mm	0.472 in./12.0mm	5.5 EBHP	19.0 lbs
	3.2	2000	1450	0.709 in./18mm	0.472 in./12.0mm	4.3 EBHP	19.0 lbs
UH2013	3.43	2900	3400	0.591 in./15mm	0.315 in./8.0mm	6.2 EBHP	19.0 lbs
UH2011	2.9	2900	3400	0.591 in./15mm	0.256 in./6.5mm	9.0 EBHP	19.0 lbs

Maritimes/Quebec/Ontario


B22

Alberta/Manitoba/Sask/BC

Phone TOLL FREE: 1.888.881.6667
Fax TOLL FREE: 1.800.350.5666

www.pressurewashcomponents.ca

Phone TOLL FREE: 1.800.527.8592
Fax TOLL FREE: 1.800.661.3719



Series 66 Triplex Plunger Pump



With solid shaft. Heavy-duty manifold with lifetime warranty. Ceramic plungers, oversized connecting rods and roller bearings. Innovative new valve cap and plunger guide design.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 3/4" - BSP-F
Discharge Port Thread: 3/8" - BSP-F
Shaft Diameter: 0.945 in./24.0 mm
Pump Dimensions: 13.5" x 9.8" x 6.3"
Max. Inlet Vacuum: 9 ft. Water (7.9 in. Hg)
Crankcase Oil Capacity: 31.04 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
W3021	5.55	4350	1450	0.709 in./18.0 mm	0.748 in./19.0 mm	16.0 EBHP	41.0 lbs
W2525	6.6	3600	1450	0.787 in./20.0 mm	0.748 in./19.0 mm	18.0 EBHP	41.0 lbs
W3025	6.6	4350	1450	0.787 in./20.0 mm	0.748 in./19.0 mm	20.0 EBHP	41.0 lbs
T3025	6.6	4350	1750	0.709 in./18.0 mm	0.748 in./19.0 mm	20.0 EBHP	41.0 lbs
W2030	7.92	2900	1450	0.866 in./22.0 mm	0.748 in./19.0 mm	15.0 EBHP	41.0 lbs
T2530	7.92	3600	1750	0.787 in./20.0 mm	0.748 in./19.0 mm	20.0 EBHP	41.0 lbs
T2830	7.92	4000	1750	0.787 in./20.0 mm	0.748 in./19.0 mm	21.0 EBHP	41.0 lbs
W2035	9.25	2900	1450	0.866 in./22.0 mm	0.827 in./21.0 mm	18.0 EBHP	41.0 lbs
T2535	9.25	3600	1750	0.866 in./22.0 mm	0.748 in./19.0 mm	22.0 EBHP	41.0 lbs
W2141	10.83	3045	1450	0.945 in./24.0 mm	0.84 in./21.0 mm	22.0 EBHP	41.0 lbs
T2040	10.56	2900	1750	0.866 in./22.0 mm	0.84 in./21.0 mm	21.0 EBHP	41.0 lbs
W1550	13.21	2180	1450	1.102 in./28.0 mm	0.748 in./19.0 mm	20.0 EBHP	41.0 lbs
T1750	13.2	2500	1750	0.945 in./24.0 mm	0.84 in./21.0 mm	22.0 EBHP	41.0 lbs

Series 66S Triplex Plunger Pump



With solid shaft. Heavy-duty manifold with lifetime warranty. Ceramic plungers, oversized connecting rods and roller bearings. Innovative new valve cap and plunger guide design. For high-pressure applications.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 3/4" - BSP-F
Discharge Port Thread: 3/8" - BSP-F
Shaft Diameter: 0.945 in./24.0 mm
Pump Dimensions: 14.0" x 9.8" x 6.3"
Inlet Pressure: 30 psi
Crankcase Oil Capacity: 31.04 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
W3521	5.6	5075	1450	0.708 in./18.0mm	0.748 in./19.0mm	20.0 EBHP	52.0 lbs
W3523	6.07	5075	1450	0.840 in./21.0mm	0.708 in./18.0 mm	20.0 EBHP	52.0 lbs
W4018	4.8	5800	1450	0.630 in./16.0mm	0.840 in./21.0mm	20.0 EBHP	52.0 lbs
W5015	3.96	7520	1450	0.748 in./19.0mm	0.630 in./16.0mm	20.0 EBHP	52.0 lbs
W4015	3.96	5800	1450	0.748 in./19.0mm	0.630 in./16.0mm	15.0 EBHP	52.0 lbs
W4518	4.75	6225	1450	0.84 in./21.0mm	0.630 in./16.0mm	21.0 EBHP	52.0 lbs
T4018	4.75	5800	1750	0.748 in./19.0mm	0.630 in./16.0mm	20.0 EBHP	52.0 lbs
W5018	4.75	7250	1450	0.629 in./16.0mm	0.840 in./21.0mm	24.0 EBHP	52.0 lbs

Maritimes/Quebec/Ontario

Phone TOLL FREE: 1.888.881.6667
Fax TOLL FREE: 1.800.350.5666

B23

www.pressurewashcomponents.ca

Alberta/Manitoba/Sask/BC

Phone TOLL FREE: 1.800.527.8592
Fax TOLL FREE: 1.800.661.3719



pressure cleaning



Hydraulic Bell Housing & Flex Coupler - for use with Series 47 & 66

- Kit includes bell housing, flex coupler and mounting hardware
- Easy to Install
- Mounts directly on the pump saving time on installation
- Improved pump life due to proper alignment with hydraulic motor
- Can be used on all Interpump Series 47 and 66

Product No.	Description
ZFH / ZGH47SBKIT	Bell Housing Kit

NEW!

Series 69 Triplex Plunger Pump

With solid shaft. The industry's choice for high-flow applications. Heavy-duty tapered roller bearings and over-sized connecting rods for maximum life.



Max. Inlet Pressure:	125 psi
Max. Fluid Temperature:	165° F
Inlet Port Thread:	3/4"-14 BSP-F
Discharge Port Thread:	3/8"-19 BSP-F
Shaft Diameter:	1.378 in./35.0 mm
Pump Dimensions:	12.9" x 11.9" x 7.3"
Max. Inlet Vacuum:	9 ft. Water (7.9 in. Hg)
Crankcase Oil Capacity:	50.7 oz.

Brass Manifold

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
TS1041B	8	1600	1450	0.787 in./20.0mm	0.866 in./22.0mm	8.8 EBHP	46.0 lbs
TS1531B	7.92	2175	1450	0.787 in./20.0mm	0.866 in./22.0mm	11.8 EBHP	46.0 lbs
W827B	1.8	1200	1000	1.417 in./36.0mm		14.5 EBHP	57.0 lbs

Aluminum Manifold

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
T41AN	12	900	650	1.417 in./36.0mm	0.945 in./24.0mm	7.4 EBHP	37.0 lbs



NEW!

Series 76 Triplex Plunger Pump

With solid shaft. Forged brass manifold with lifetime warranty. The industry's choice for high-flow applications. Over-sized connecting rods for maximum life.



Max. Inlet Pressure:	125 psi
Max. Fluid Temperature:	165° F
Inlet Port Thread:	1" - 11 BSP-F
Discharge Port Thread:	3/4" - 14 BSP-F
Shaft Diameter:	1.378 in./35.0 mm
Pump Dimensions:	15.6" x 14.0" x 9.5"
Max. Inlet Vacuum:	9 ft. Water (7.9 in. Hg)
Crankcase Oil Capacity:	91.0 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
WK6	16.4	1450	1000			16.1 EBHP	86 lbs
WK8	21.1	1450	1000			20.8 EBHP	86 lbs

Maritimes/Quebec/Ontario

Phone TOLL FREE: 1.888.881.6667
Fax TOLL FREE: 1.800.350.5666

B24

www.pressurewashcomponents.ca


Alberta/Manitoba/Sask/BC

Phone TOLL FREE: 1.800.527.8592
Fax TOLL FREE: 1.800.661.3719



NEW!

Car Wash Series 77 Sixplex Plunger Pump




Forged brass manifold with lifetime warranty. Most widely used pump frame in the touchless car wash industry. Dual manifolds utilizing a common crankcase for efficient performance.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1.0" - 11 BSP-F
Discharge Port Thread: 3/4" - 14 BSP-F
Shaft Diameter: 1.378 in./35.0 mm
Pump Dimensions: 22.1" x 14.0" x 9.7"
Max. Inlet Vacuum: 9 ft. Water (7.9 in Hg)
Crankcase Oil Capacity: 64.0 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
WK15	39.61	1740	1000	1.417 in./36mm	1.102 in./28mm	46.8 EBHP	142.0 lbs

NEW!

Series 76 Triplex Plunger Pump




With solid shaft. Forged brass manifold with lifetime warranty. The industry's choice for high-flow applications. Over-sized connecting rods for maximum life.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1" NPT-F
Discharge Port Thread: 1/2" NPT-F
Shaft Diameter: 1.378 in./35.0 mm
Pump Dimensions: 15.6" x 14.0" x 9.5"
Max. Inlet Vacuum: 7 ft. Water (6.2 in. Hg)
Crankcase Oil Capacity: 91.0 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
WKF55	14.5	2175	1000			21.4 EBHP	86.0 lbs
WK525	5.8	7250	1450			28.6 EBHP	90.0 lbs
T4251BN	6.6	5800	1000			26.3 EBHP	101.0 lbs

NEW!

Series 76 Triplex Plunger Pump



Forged brass manifold with lifetime warranty. Dual manifolds utilizing a common crankcase for efficient performance in high-flow applications.

Max. Inlet Pressure: 125 psi
Max. Fluid Temperature: 165° F
Inlet Port Thread: 1" - 11 BSP-F
Discharge Port Thread: 3/4" - 14 BSP-F
Shaft Diameter: 1.378 in./35.0 mm
Pump Dimensions: 22.1" x 14.0" x 9.7"
Max. Inlet Vacuum: 9 ft. Water (6.2 in. Hg)
Crankcase Oil Capacity: 71.0 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
WK159	28	2175	1000			41.2 EBHP	142.0 lbs
WK12	31.7	1740	1000			37.6 EBHP	142.0 lbs
wk165	39.6	1740	1000			46.8 EBHP	142.0 lbs

Maritimes/Quebec/Ontario


Phone TOLL FREE: 1.888.881.6667
Fax TOLL FREE: 1.800.350.5666

B25

www.pressurewashcomponents.ca

Alberta/Manitoba/Sask/BC


Phone TOLL FREE: 1.800.527.8592
Fax TOLL FREE: 1.800.661.3719



agricultural application

NEW!

Series 77 Sixplex Plunger Pump




With a nickel-plated, forged brass manifold with lifetime warranty. Dual manifolds utilizing a common crankcase for efficient performance. Unique "in-line" valve system for easy access and durability.

Max. Inlet Pressure:	125 psi
Max. Fluid Temperature:	165° F
Inlet Port Thread:	1" - 11 BSP-F
Discharge Port Thread:	1/2" - 14 BSP-F
Shaft Diameter:	1.378 in./35.0 mm
Pump Dimensions:	25.2" x 14.0" x 10.0"
Max. Inlet Vacuum:	7 ft. Water (6.2 in. Hg)
Crankcase Oil Capacity:	71.0 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
W355	15.1	5.75	1000	0.787 in./20.0mm		51.8 EBHP	139.0 lbs

Series 75 Duplex Plunger Pump




With splined shaft. Ideal for drain cleaning and jetting applications. Aluminum manifold and solid ceramic plungers with continuously lubricated packings.

Max. Inlet Pressure:	125 psi
Max. Fluid Temperature:	165° F
Inlet Port Thread:	3/4" - 14 BSP-F
Discharge Port Thread:	3/8" - 19 BSP-F
Shaft Diameter:	1.375 in./34.9 mm ASAE Splined
Pump Dimensions:	12.0" x 9.0" x 7.3"
Max. Inlet Vacuum:	N/A
Crankcase Oil Capacity:	61.0 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
T33	7.93	435	650	1.417 in./36.0mm	0.945 in./24.0mm	2.4 EBHP	28.0 lbs

NEW!

Series 75 Triplex Plunger Pump



With splined shaft. Ideal for drain cleaning and jetting applications. Aluminum manifold and solid ceramic plungers with continuously lubricated packings.

Max. Inlet Pressure:	125 psi
Max. Fluid Temperature:	165° F
Inlet Port Thread:	1" - 14 BSP-F
Discharge Port Thread:	3/4" - 19 BSP-F
Shaft Diameter:	1.375 in./34.9 mm ASAE Splined
Pump Dimensions:	15.6" x 14.0" x 9.5"
Max. Inlet Vacuum:	N/A
Crankcase Oil Capacity:	61.0 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
AB80	19.8	870	550	36mm		11.7 EBHP	91.0 lbs
AB90	23.8	870	650	36mm		14.0 EBHP	91.0 lbs

Maritimes/Quebec/Ontario

B26

Alberta/Manitoba/Sask/BC


Phone TOLL FREE: 1.888.881.6667
Fax TOLL FREE: 1.800.350.5666

www.pressurewashcomponents.ca

Phone TOLL FREE: 1.800.527.8592
Fax TOLL FREE: 1.800.661.3719



Series 75 Triplex Plunger Pump




With splined shaft. Ideal for drain cleaning and jetting applications. Aluminum manifold and solid ceramic plungers with continuously lubricated packings.

Max. Inlet Pressure:	125 psi
Max. Fluid Temperature:	165° F
Inlet Port Thread:	1" - 14 BSP-F
Discharge Port Thread:	3/4" - 19 BSP-F
Shaft Diameter:	1.375 in./34.9 mm ASAE Splined
Pump Dimensions:	13.0" x 14.0" x 7.5"
Max. Inlet Vacuum:	N/A
Crankcase Oil Capacity:	61.0 oz.

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
T55	13.22	725	650	1.417 in./36.0mm	0.945 in./24.0mm	6.6 EBHP	36.0 lbs
T44	10.57	725	650	1.417 in./36.0mm	0.945 in./24.0mm	5.2 EBHP	36.0 lbs

NEW!

Interpump AB Series



- Totally interchangeable with 76 series pumps
- High thickness nicle coated cast iron manifold
- Solid ceramic pistons
- Internal design improved to last longer, improve overall servcability of the pump
- New patented dual side wall crank case
- Dual diameter piston guide
- Simplified installation and servicing compared to the two Manifold pumps

Product No.	GPM	PSI	RPM	Bore	Stroke	HP	Weight
AB100	26.4	870	550	40 mm		15.6 EBHP	91.0 lbs
AB110	29.1	870	550	40 mm		17.1 EBHP	91.0 lbs
AB120	31.7	870	550	45 mm		18.7 EBHP	91.0 lbs
AB140	37.0	870	550	45mm		21.8 EBHP	91.0 lbs
AB150	39.6	870	550	50 mm		23.4 EBHP	91.0 lbs
AB180	47.6	870	650	50 mm		28.1 EBHP	91.0 lbs

All models are available with double pto only (pto - pto shaft or pto smooth). Please specify when ordering:

- CC pto - pto shaft version
- CL pto left and smooth right
- LC pto right and smooth left